


Optronis

Make time visible

CAMPERFORM-CYCLONE SERIES

Cyclone-2-2000

High-Speed Machine Vision Camera

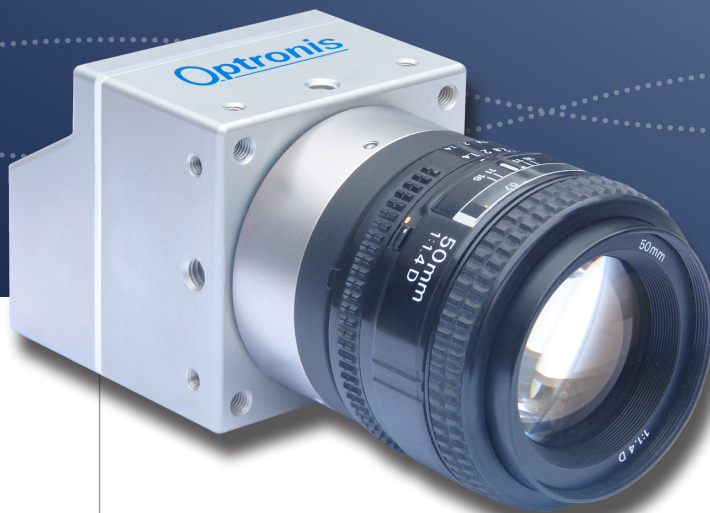

CXP-12

- ☒ METROLOGY AND HIGH SPEED MACHINE VISION
- ☒ LASER LINE PROFILOMETRY
- ☒ AUTOMATED OPTICAL INSPECTION (AOI)

- 2 157 fps with 1 920 x 1 080 pixels
- Global shutter with low noise pixel
- Micro-BNC (HD-BNC™) connectors
- CoaXPress V2.0 interface with 4 x 12.5 Gbit/s
- Power and trigger via CoaXPress
- Microsecond and frame counter

www.optronis.com

Cyclone-2-2000 High-Speed Machine Vision Camera

Optronis

Make time visible

FEATURES

The Cyclone-2-2000 is a high resolution camera with low noise pixels. It is part of Optronis CamPerform-Cyclone series for demanding machine vision applications. Reducing vertical resolution allows increased frame rate.

- 1 920 x 1 080 pixel resolution
- low noise pixel
- frame rate increases with vertical window size reduction

Firmware features

- Analogue gain adjustment
- Analogue offset adjustment
- Hot pixel correction (customer activatable)
- LUT factory set or customer definition
- Framenumber and Microsecond counter on image

PERFORMANCE (EXAMPLES, 8 BIT)

Resolution (HxV)	Frame rate	Resolution (HxV)	Frame rate
1 920 x 1 080	2 158 fps	1 920 x 960	2 428 fps
1 280 x 960	2 598 fps	1 920 x 480	4 845 fps
640 x 480	5 186 fps	1 920 x 120	19 145 fps
512 x 384	6 476 fps	1 920 x 32	68 699 fps
256 x 8	250 000 fps	1 920 x 8	233 576 fps

MODELS

Cyclone-2-2000-M	monochrome Camera
Cyclone-2-2000-C	color Camera
Scope of delivery	Camera, brief introduction

ACCESSORIES

CY-CM	C-Mount lens adapter
CY-FM	F-Mount lens adapter
CY-M42	M42 Mount lens adapter
CPH6-PTC	Pig tail cable for synch
CPH6-USB	Programming Cable
CY-HIS	Heat Sink
CY-FAN	Cooling Fan

SPECIFICATIONS


Sensor type	LUX19HS, Global Shutter
Resolution	1 920 pixel x 1 080 pixel
Frame rate (full resolution)	20 .. 2 158 fps
Exposure time	4 μ s .. 1 / frame rate
Active area / Diagonal	19.20 mm x 10.80 mm / 22.03 mm
Pixel size	10.0 μ m x 10.0 μ m
A/D conversion	8/10 Bit
Sensitivity (sensor)	20 V/lux·s @ 550 nm
Quantum efficiency (sensor)	>45 % @ 550 nm
Synchronization	internal, external, CoaXPress
Synchronization signals	Synch IN and Synch OUT, TTL level, electrically isolated
Interface	CoaXPress 2.0 (4 ch., CXP-12) Micro-BNC (HD-BNC) connectors
Power	12 W, PoCXP, ext.
Temperature Ranges	
- operation, amb., no cooling	0 .. +30°C / 32 .. 86°F
- operation, amb., with CY-HIS	0 .. +40°C / 32 .. 104°F
- operation, amb., with CY-FAN	0 .. +55°C / 32 .. 131°F
- operation, case temperature	0 .. +70°C / 32 .. 158°F
Weight	400 g w/o mount, w/o cooling
Dimensions	65 mm x 65 mm x 71 mm (3D model data available)

EMVA1288 measurements (v3.1 typ. preliminary)

Dynamic range	TDB dB
Saturation capacity	15 000 e ⁻
Temporal dark noise	10 e ⁻
System gain	15 e ⁻ /DN
Signal-to-Noise Ratio	50 dB



TECHNICAL DRAWINGS

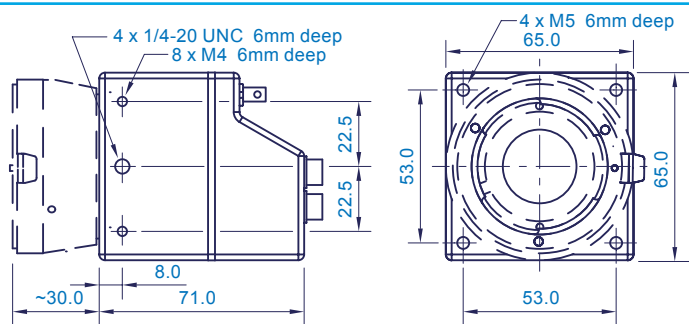

CONTACT INFORMATION

Optronis GmbH
Ludwigstraße 2
77694 Kehl
Germany

Phone: +49 7851 91 26 - 0
Fax: +49 7851 91 26 - 10
info@optronis.com
www.optronis.com

The information given herein is believed to be reliable, however Optronis makes no warranties as to its accuracy or completeness. Data sheet is subject to modifications at any time. Version A

