


Optronis

Make time visible

CYCLONE SERIES

Cyclone-5-700

High-Speed Machine Vision Camera

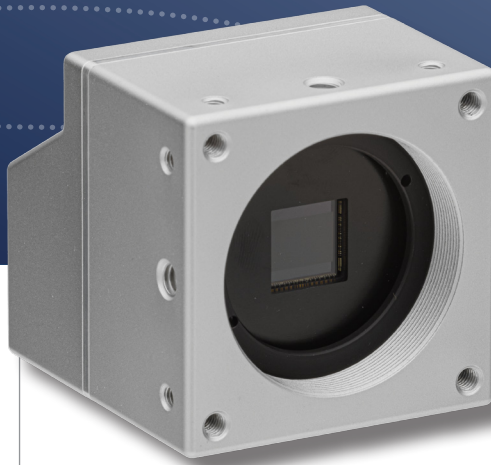

CoaXP-12

- ✓ METROLOGY AND HIGH SPEED MACHINE VISION
- ✓ AUTOMATED OPTICAL INSPECTION (AOI)
- ✓ LASER TRIANGULATION

- 693 fps with 2 560 x 1 916 pixels
- Global shutter with low noise pixel
- Micro-BNC (HD-BNC™) connectors
- CoaXPress V2.1 interface with 4 x 12.5 Gbit/s
- Power and trigger via CoaXPress
- Microsecond and frame counter

www.optronis.com

Cyclone-5-700 High-Speed Machine Vision Camera

Optronis

Make time visible

FEATURES

The Cyclone-5-700 is a high resolution camera with low noise pixels. It is part of Optronis Cyclone series for demanding machine vision applications. Reducing vertical resolution allows to increase frame rate.

- 2 560 x 1 916 pixel resolution
- low noise pixel
- frame rate increases with vertical window size reduction

Firmware features

- Analogue gain adjustment, RGB gain
- Analogue offset adjustment
- Settings save to flash
- Hot pixel correction (customer activatable)
- LUT factory set or customer definition
- Framenumber and Microsecond counter on image

PERFORMANCE (EXAMPLES)

Resolution (HxV)	Frame rate	Resolution (HxV)	Frame rate
2 560 x 1 916	693 fps	2 560 x 960	1 380 fps
1 920 x 1 080	1 227 fps	2 560 x 480	2 743 fps
256 x 8	95 057 fps	2 560 x 8	95 057 fps

MODELS

Cyclone-5-700-M	monochrome Camera
Cyclone-5-700-C	color Camera
Scope of delivery	Camera, brief introduction

ACCESSORIES

CY-CM	C-Mount lens adapter
CY-FM	F-Mount lens adapter
CY-FMG	FMG-Mount lens adapter
CY-M42	M42 Mount lens adapter
CPH6-PTC	Pig tail cable for synch
CPH6-USB	Programming Cable
CY-HIS	Heat Sink
CY-FAN	Cooling Fan




SPECIFICATIONS

Sensor type	LUX51, Global Shutter
Resolution	2 560 pixel x 1 916 pixel
Frame rate (full resolution)	20 .. 693 fps
Exposure time	4 µs .. 1 / frame rate
Active area / Diagonal	12.80 mm x 9.60 mm / 16.00 mm
Pixel distance	5.0 µm x 5.0 µm
A/D conversion	8/10 Bit
Quantum efficiency (sensor)	>45 % @ 550 nm
Synchronization	internal, external, CoaXPress
Synchronization signals	Synch IN and Synch OUT, TTL level, electrically isolated
Interface	CoaXPress 2.1 Micro-BNC (HD-BNC) connectors
Interface Configurations	4 x CXP12, 2 x CXP12, 1 x CXP12, 4 x CXP6, 2 x CXP6
Power	12 W, PoCXP, ext.
Temperature Ranges	- operation, amb., no cooling - operation, amb., with CY-HIS - operation, amb., with CY-FAN - operation, case temperature
Weight	400 g without mount
Dimensions	65 mm x 65 mm x 71 mm

EMVA1288 data (v4.0 typ.)	8 bit
Dynamic range	53 dB
Saturation capacity	12 000 e ⁻
Temporal dark noise	16 e ⁻
System gain	50 e ⁻ /DN
Signal-to-Noise Ratio	41 dB
Dark Signal Non-Uniformity	70 e ⁻
Photo Response Non-Uniformity	2.0 %
Non-Linearity Error (v3.0)	1.1 %

TECHNICAL DRAWING

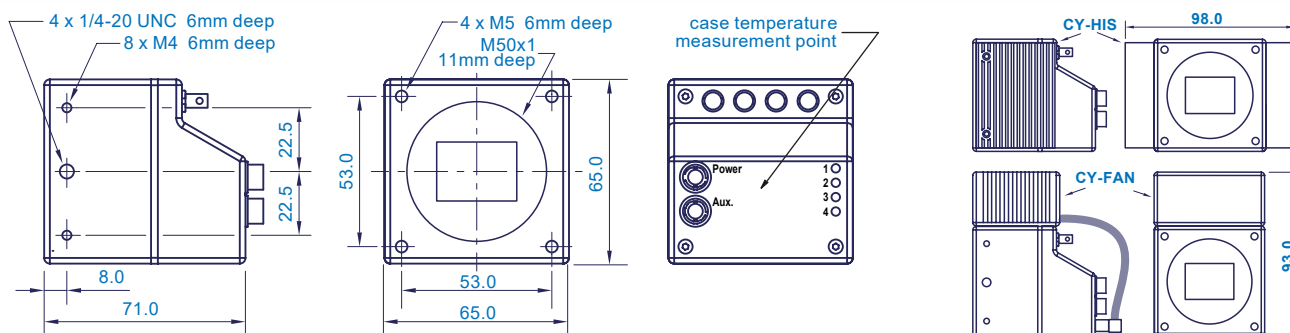

CONTACT INFORMATION

Optronis GmbH
Ludwigstraße 2
77694 Kehl
Germany

Phone: +49 7851 91 26 - 0
Fax: +49 7851 91 26 - 10
info@optronis.com
www.optronis.com

The information given herein is believed to be reliable, however Optronis makes no warranties as to its accuracy or completeness. Data sheet is subject to modifications at any time. 11.25