


Optronis

Make time visible

CYCLONEFIBER SERIES

CycloneFiber-21

High-Speed Machine Vision Camera

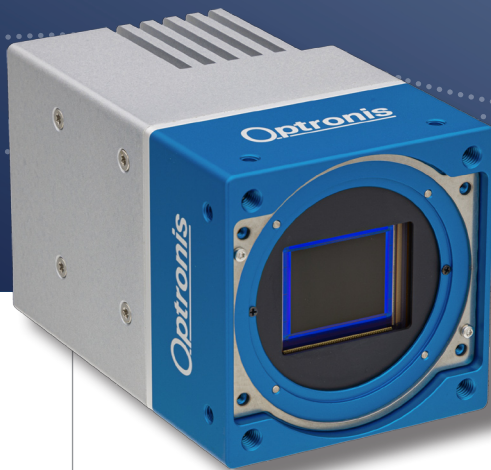

CoaXPress
over-Fiber

- ☑ OUTDOOR TEST AREA
- ☑ MEDICAL ENVIRONMENT
- ☑ PRODUCTION FLOOR INSPECTION

- 230 fps with 5 120 x 4 096 pixels
- GSPRINT4521 global shutter sensor
- High full well capacity >30 ke⁻
- CoaXPress over-Fiber 40 Gbit/s
- EMC immune transmission up to 20 km
- Trigger via CoaXPress-over-Fiber

www.optronis.com

CycloneFiber-21 High-Speed Machine Vision Camera

Optronis

Make time visible

FEATURES

The CycloneFiber-21 is designed for demanding high-speed and high resolution machine vision applications. The camera uses the CoaXPress-over-Fiber (CoF) de-facto standard protocol. The main advantage of this transmission is the long range and immunity to EM interference.

Firmware features

- Analogue gain, RGB gain and offset adjustment
- Defect pixel correction (customer activatable)
- LUT factory set or customer definition
- Framenumber and Microsecond counter on image

PERFORMANCE (EXAMPLES, 8 BIT, SEE ALSO FRAME RATE CALCULATOR)

Resolution (HxV)	Frame rate	Resolution (HxV)	Frame rate
5 120 x 4 096	230 fps	5 120 x 2 048	456 fps
3 840 x 2 176	442 fps	5 120 x 1 024	897 fps
1 920 x 1 088	871 fps	5 120 x 512	1 735 fps
640 x 480	1 898 fps	4 928 x 32	14 436 fps

MODELS

CycloneFiber-21-M	monochrome Camera
CycloneFiber-21-C	color Camera,
Scope of delivery	Camera, brief introduction




ACCESSORIES

CYP-CM	C-Mount lens adapter
CYP-FM	F-Mount lens adapter
CYP-M42-12	M42 Mount, BF 12 mm
CYP-M58-11,58	M58 Mount, BF 11.58 mm
CPH6-PTC	Pig tail cable for synch
CPH6-USB	Programming Cable
CYP-FAN	Cooling Fan
CPH4-PSA	Power Supply

For camera operation, power supply and typically one lens mount are needed.



TECHNICAL DRAWINGS

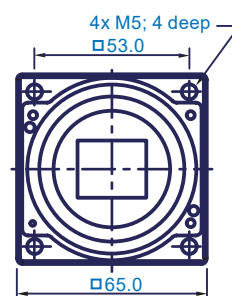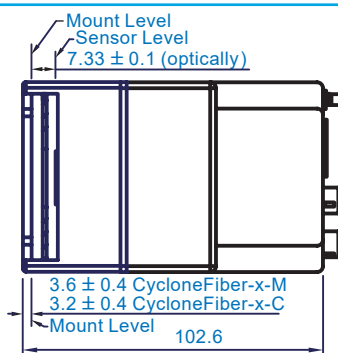

CONTACT INFORMATION

Optronis GmbH
Ludwigstraße 2
77694 Kehl
Germany

Phone: +49 7851 91 26 - 0
Fax: +49 7851 91 26 - 10
info@optronis.com
www.optronis.com

The information given herein is believed to be reliable, however Optronis makes no warranties as to its accuracy or completeness. Data sheet is subject to modifications at any time. 11.25

SPECIFICATIONS

Sensor type	GSPRINT4521, Global Shutter
Resolution	5 120 pixel x 4 096 pixel
Frame rate (full resolution)	1 .. 230 fps
Exposure time	4 µs .. 1 / frame rate
Active area / Diagonal	23.04 mm x 18.43 mm / 29.50 mm
Pixel distance	4.5 µm x 4.5 µm
A/D conversion	8/10 Bit
Device Tap Geometry	1X-2YE
Quantum efficiency (sensor)	63 % @ 520 nm
Synchronization	internal, external, CoF
Synchronization signals	Synch IN and Synch OUT, TTL level, electrically isolated
Interface	QSFP+ port
Protocol	CoaXPress-over-Fiber (CoF)
Power (incl. 1.5 W QSFP+ module)	23 W

Temperature Ranges

- operation, amb., no cooling	0 .. +15°C / 32 .. 59°F
- operation, amb., with CY-FAN2	0 .. +35°C / 32 .. 95°F
- operation, case temperature	0 .. +60°C / 32 .. 140°F

Weight	560 g w/o mount, cooling, QSFP+
--------	---------------------------------

Dimensions	65 mm x 65 mm x 102.6 mm (3D model data available)
------------	---

EMVA1288 measurements (v3.1 typ. 10 bit)

Dynamic range	59 dB
Saturation capacity	31 000 e ⁻
Temporal dark noise	35 e ⁻
System gain	31 e ⁻ /DN
Signal-to-Noise Ratio	45 dB
DSNU	18 e ⁻
PRNU	1.6 %
Non-linearity error (v 3.0)	0.5 %